

The Saturated Flow Modeling On Motorcycle Behavior In Through Movement

by I Made Kariyana

Submission date: 17-May-2021 06:30PM (UTC+0700)

Submission ID: 1587887750

File name: CEA-14823686_3_1.doc (503.5K)

Word count: 5830

Character count: 30932

The Saturated Flow Modeling On Motorcycle Behavior In Through Movement

I M Kariyana¹, P A Suthanaya², D M P Wedagama³, I M A Ariawan⁴

¹Doctor of Engineering Study Program, Udayana University, Denpasar, 80361, Bali, Indonesia
^{2,3,4}Department of Civil Engineering, Faculty of Engineering, Udayana University, Denpasar, 80361, Bali, Indonesia
*Corresponding Author: made.kariyana@unr.ac.id

Copyright©2021 by authors, all rights reserved. Authors agree that this article remains permanently open access under the terms of the Creative Commons Attribution License 4.0 International License

Abstract In developing countries such as Indonesia the proportion of motorcycles to other vehicles is reaching 76%, which is very high. The proportion of motorcycles in Bali Province exceeds 85% while in Denpasar City is 82%. Previous studies suggest that high proportion of motorcycles will certainly have an effect on the saturated flow. Therefore, the effect of motorcycles on saturation flows should not be neglected. With a high proportion of motorcycles that will affect the behavior of motorcyclist. At irregular intersections such as in front of the stop line, beside other vehicles and behind other vehicles or in the flow, the behavior of the motorcycle affects the saturated flow. In calculating saturated flow, the Indonesian Highway Capacity Manual (IHCM) does not have a specific-measures that adopts the behavior of motorcycles. If the motorcycle is not properly regulated, it will interfere with the movement of other vehicles when the green light is on. The behavior to be examined in this study is the behavior of motorcycles in front of the stop line, outside the current (beside flow), or in the current (inside flow). In this study, a model was developed to determine saturation flow based on the behavior of motorcycles on through movements at signalized intersections with or without ESSM.

Keywords Motorcycle behavior, Saturation flow, signalized intersections, exclusive stopping space for motorcycles (ESSM).

1. Introduction

Study of signalized intersections is one of the most effective measures to increase road network capacity and reduce traffic congestion [6]. The management of signaled intersection traffic flow is much easier to research and analyze if all motorized vehicles are homogeneous [8]. Mixed traffic dominated by motorcycles is very common in most Asian countries such as Taiwan, Thailand, Vietnam, Indonesia and Malaysia. For example, the proportion of motorcycles in Hanoi and Ho Chi Minh City in Vietnam is

around 90% [6]. In Taiwan, the concept of segregated traffic flow (motorcycle lane separation) was proposed and successfully implemented to improve mixed traffic performance.

The Indonesian government is preparing Exclusive Stopping Space for Motorcycle (ESSM) at several signalized intersections, to accommodate the high number of motorcycles. ESSM is a motorcycle facility in the form of providing motorcycle facilities at signalized intersections. ESSM is an alternative solution to the problem of motorcycle congestion at signalized intersections. When entering the green time signal, motorcycles move with various maneuvers to get out of the approach to the intersection, so that it often creates traffic conflicts which are thought to affect the performance and flow of traffic movements at the intersection [12].

A better understanding of the impact of motorcycles on traffic flow affects the development of a more accurate model to determine the effect of motorcycles on saturated flow [6]. Saturation flow plays an important role in the design of a signalized intersection [18]. The saturation flow (S) is the amount of queue departure in an approach during the specified conditions (pcu/green hour). Meanwhile, the basic saturation flow is the amount of queue departure in the approach during ideal conditions (pcu/green hour) [13].

As a reference for determining intersection parameters such as saturated flow and capacity in Indonesia, the Indonesian Highway Capacity Manual (IHCM) was published in 1997. In 1997, the composition of motorcycles for urban areas in Indonesia was at the average of 40.5% [13], which is very different from the current condition. It was found that based on the preliminary survey, the composition of motorcycles in Denpasar City was 82%. Although Indonesian urban areas clearly have a high percentage of motorcycles, there has been no adjustment to IHCM regarding the high percentage of motorcycles, the number of vehicle ownership and the behavior of motorcycles in Indonesia. The IHCM determines the saturation flow based on the basic saturation flow times the adjustment factor. Besides that, the passenger car equivalent (PCE) value also does not reflect the real conditions in the field. The PCE

value has been determined such as the PCE for motorcycle is 0.2, the PCE for light vehicle is 1 and the PCE for heavy vehicle is 1.3, without any PCE analysis at each intersection studied. Improper regulation of motorcycles, especially at intersections, will not only reduce the level of service at intersections, but may also lead to an increase in road traffic accidents.

The behavior of the motorcycle users at a signalized intersection has affected saturated flows, especially motorcycles in the current (inside flow), the greater the composition of the motorcycle in the flow, the higher the saturation flow [11]. According to the [9,14,16,], the behavior of motorcycles at signalized intersections can be grouped into several categories, namely motorcycles in front of the stop line, motorcycles in the current (inside flow), and motorcycles outside the current (beside flow). This study examines the behavior of motorcycles towards saturated flow on through movements because in Denpasar City for large traffic flows, the arrangement of intersections with more signals is through movement to reduce conflict at signalized intersections. Through movements are free movements that are not affected by conflict [18,19] while according to [2,20] through movements are movements (turn right, go straight, turn left) in each approach that is given the green light simultaneously, and given 1 phase per approach so that vehicles turning right do not have to wait to enter opposite traffic. In this study, what is meant by through movement is the movement of traffic at an intersection approach that has 1 phase or an intersection whose approach has the same phase as other approaches but the movement does not affect or be influenced by the movements of other approaches.

The study of traffic flow at signalized intersections is a new topic, several studies have been conducted to examine saturated flow and capacity aimed at improving traffic conditions at signalized intersections or across the transportation network. However, from previous research, no one has determined the influence model of motorcycle behavior at signalized intersections, namely the behavior of motorcycles in front of the stop line, inside flow (inside flow) and outside flow (beside flow), both those with ESSM and without ESSM to saturated flows. Motorcycle behavior research conducted in Malaysia by Leong et al. [11] and in Ghana by Adams et al. [1] only analyzed the effect of motorcycle behavior in the flow (inside flow) without analyzing the behavior of motorcycles in front of the stop line and outside the flow (beside flow) and also does not analyze the differences in behavior at the signalized intersections that have ESSM or without ESSM. There are also many researches related to ESSM, such as research by [3-7], but no research has analyzed the effect of motorcycle behavior with and without ESSM on saturation flow. Most of the studies only examined the effectiveness of ESSM from the level of ESSM filling and the effect of motorcycles (total motorcycles) on saturated flows, not on motorcycle behavior. Research on the behavior of motorcycles at signalized intersections is important to obtain the best model in

determining the saturation flow of the motorcycles behavior model at signalized intersections which are partially or simultaneously dominated by motorcycles. determine policies related to regulating motorcycles at signalized intersections, such as designing the ESSM, making separate lanes between motorcycles and other vehicles and setting traffic lights. In this research, we will obtain a model or formula to determine the saturated current only by knowing the behavior of motorcycles at signalized intersections which are dominated by motorcycles. This study also provides suggestions for overcoming the accumulation of vehicles at intersections with signals that are dominated by motorcycles which may be applicable to other areas that have the same characteristics, both the geometric and the proportions of the motorcycles. A model of motorcycle behavior towards saturated flow was developed, both with and without ESSM.

2. Materials and Methods

The regression method is more relevant for the estimation of saturation flow at signalized intersections because its implementation of calculations is easier and simpler. However, this technique relies heavily on accurate estimation of saturation flow which is also a function of determining PCE [15]. In order to obtain an accurate saturation flow estimation, the method of determining the saturation flow at signalized intersections in this study is used from Chang and Xiao [5]. Traditional methods that only use the average discharge headway to estimate the saturation headway can lead to underestimation. Errors in the saturated flow used for the estimation of vehicle delays can cause errors in the prediction of delay and Level of Service (LOS). Therefore, it is necessary to conduct a study to increase the accuracy of the saturation flow estimation. The facts show that driver behavior is the main determinant of saturation flow, therefore a good understanding of the time between discharge headways is essential in estimating the time between saturation headway and saturation flow rate. The stochastic properties of the time between vehicle releases could provide better information for the development of a method of estimating saturation flow rates [5]. It is easy to understand that the time between vehicle releases is a random variable due to differences in driver behavior response times and variations in queue space length. To estimate the saturation headway time, the average time between vehicle releases is calculated as follows:

$$\bar{h}_s = \frac{1}{n} \sum_{i=1}^n h_{si} \quad (1)$$

With,

h_s : the average time between discharges (s) which is taken as the estimated time between saturations h ;

h_i : time between vehicles i in queue, $i = 1, 2, \dots, n$ (n is the sample size), consequently, the level of saturation flow is (conventionally) determined by the time between

discharge:

$$S = \frac{3600}{\bar{h}_s} \quad (2)$$

With,

S is the saturation flow level (vehicle / hour).

Based on the statistical theory that: If the intermediate time distribution is symmetric, The average intermediate time calculated by equation (2) is a good (unbiased) estimate of h and equation (2) can be a good estimate for the saturation flow rate [14]. However, if the intermediate time distribution is not symmetrical, h_s is not a good estimate and equation (2) will give a saturation flow level value that is too high (overestimate) or too low (underestimate). Therefore, it is necessary to study the stochastic nature of the time between queuing vehicles and to analyze the effect of time variation between the estimated saturation flow rates [5].

When the mean time between queue releases is greater than the median value and the skewness of the intermediate time values is positive, this characteristic indicates that the time distribution between queues releases tends to be asymmetrical and the normal distribution function does not match the intermediate time data [5]. Therefore, the conventional saturation flow rate estimation method (equation 2) can produce an underestimated saturation flow level value.

If the time distribution between queue releases tends to be asymmetrical, then the intermediate time value can be modeled with a lognormal distribution [5,17] If it is known that when the random variable h_s function density is lognormal, then $\ln h_s$ will follow the normal distribution. Therefore, it is very relevant to use the median value to calculate the saturation flow rate in the following way:

$$S_1 = 3600 \times \frac{1}{h_{med}} \quad (3)$$

With,

S_1 : new estimate of the saturation flow rate (vehicles/hour);
 h_{med} : the median value of the intermediate time or the estimated median value of the intermediate time.

In addition, there are two new estimates for the saturation

flow rate [14]

$$S_2 = 3600 \times \exp\left(-\frac{1}{n} \sum_{i=1}^n \ln h_{si}\right) \quad (4)$$

$$S_3 = \frac{3600}{\bar{h}_s} \times \left(1 + \frac{\sigma_s^2}{\bar{h}_s^2}\right)^{0.5} \quad (5)$$

With,

S_2 and S_3 are two new estimates of the saturation flow rate (vehicles / hour).

$$\sigma_s^2 = \left[\frac{1}{n} - 1 \cdot \sum_{i=1}^n (h_{si} - \bar{h}_s)^2 \right] \quad (6)$$

represents the variance of the intermediate time sample.

The location of the selected intersection is one that has a large volume of motorcycles, namely 82 percent [4], minor side barriers, namely interference from factors such as pedestrians, vehicles turning left or right, parking vehicles (on street parking) and bus stops or stops, both those with ESSM and those without ESSM at one of the intersection approaches. The intersection chosen is also one of the approaches that has a through movement of motorcycles or is not affected by conflict, whether there is an ESSM or no ESSM.

This study was conducted in Denpasar City. Based on data obtained from the Denpasar City Department of Transportation, Denpasar City has 66 intersections with signals, of which 15 intersections have Exclusive Stopping Space for Motorcycle and 51 intersections have no ESSM [10]. For the purposes of the analysis, an approach has been chosen at the four signalized intersections which have approximately the same volume of vehicles passing through the intersection, The same approach width and has the proportion of motorcycles that reflect the same mixed traffic flow conditions between the existing ESSM and those without the ESSM as in Table 1. Discharge Headway data is obtained from video recordings of the Denpasar City Area Traffic Control System (ATCS), data retrieval is carried out at peak hours in the morning, afternoon and evening for 2.5 hours per each busy hour.

Table 1. Intersections with the same Approach Width and Traffic Characteristics

No.	Approach Width (m)	Intersection		Approach	
		With ESSM	Without ESSM	With ESSM	Without ESSM
1	7	Dewi Sartika	Kebo Iwa	Dewi Sartika	Gatot Subroto Barat (T)
		Dewi Sartika	Kebo Iwa	Teuku Umar	Gatot Subroto Barat (B)
2	5	Kapten Japa	Saelus	Hayam Wuruk (T)	Diponegoro (S)
		Kapten Japa	Surabi	Hayam Wuruk (B)	Supratman (B)
3	3	Nangka	Perumnas	Nangka (U)	Buana Raya
		Unud	Saelus	Serma Mendra	Pulau Saelus

3. Results and Discussion

Headway data were obtained from the Denpasar City Area Traffic Control System (ATCS) video recordings, which include 9440 headway data for an approach with an

effective width of 3 meters with ESSM and 10833 without ESSM. Discharge headway data from the approach of the effective width of 5 meters with ESSM as much as 14161 and without ESSM 19667 data. Discharge headway data from the approach of the effective width of 7 meters with ESSM as much as 14002 and without ESSM 14932 data. Discharge headway data from each approach were combined into one for each approach width, both with ESSM and without ESSM to get the saturated flow value.

In Table 2, it can be seen that the proportion of vehicles in each approach with an approach width of 3 meters, 5 meters and 7 meters, both with ESSM and without ESSM. Based on Table 2, the percentage of the proportion of motorcycles is relatively the same as the 1-2 percent difference between the approach with ESSM and without ESSM except for the 3 meters width of the approach, there is a difference of 5.6% of the approach without ESSM, the greater the percentage of motorcycles compared to those with ESSM approach.

Table 2. Percentage of proportion of vehicles in each approach with and without ESSM

Approach Width		Vehicle		
		Motor cycle	Light Vehicle	High Vehicle
3m	Non ESSM	90,36	8,79	0,85
	ESSM	84,76	14,66	0,59
5m	Non ESSM	82,09	16,11	1,80
	ESSM	81,60	17,99	0,41
7m	Non ESSM	78,74	19,40	1,86
	ESSM	76,78	22,62	0,61

Meanwhile, the percentage of motorcycle behaviour in each approach, both with ESSM and without ESSM, is as shown in Table 3. Based on Table 3, motorcycles at a signalized intersection tend to behave beside flow (beside other vehicles), both those with ESSM and without ESSM, this happens because motorcycles has more freedom to maneuver because there are no light vehicles in front of them. The percentage of the behaviour of motorcycles beside flow is greater than inside flow at a signalized intersection with ESSM, whether the approach width is 3 meters, 5 meters or 7 meters.

Table 3. Percentage of motorcycle behaviour of each approach with and without ESSM

Approach Width		Motorcycle Behaviour		
		Infront of stop line	Beside flow	Inside flow
3m	Non ESSM	3,06	75,45	22,24
	ESSM	1,61	79,54	19,18
5m	Non ESSM	1,87	50,20	48,86
	ESSM	1,46	65,62	33,43
7m	Non ESSM	4,03	55,20	42,58
	ESSM	0,42	57,16	42,61

Furthermore, the headway data analysis was carried out in SPSS descriptively as well as knowing the form of data distribution. The purpose of this analysis is to see whether the data distribution patterns are normally distributed or not. The form of data distribution can be determined through

statistical calculations with the Shapiro-Wilk or Kolmogorov Smirnov approach. The data of less than 50 uses the Shapiro Wilk approach, while those more than 50 use the Kolmogorov-Smirnov. The data is said to be normally distributed if the Sig. from the test statistic is greater than 0.05.

Data with normal distribution were calculated to obtain the saturation flow with the Formula 2, while data that were not normally distributed, were calculated using the Formula (3, 4, 5). Based on the observations on the saturation flow values at S_1 , S_2 , and S_3 , the saturation flow values are almost the same. This result is also confirmed by [10] who simulated the calculations using the S_1 , S_2 , and S_3 formula approaches. Based on the results of this analysis, a similar saturation flow value is obtained, so it can be concluded that the S_1 , S_2 , or S_3 values can be selected for use by the researcher.

This study uses the S_3 formula for data that is not normally distributed, because the S_3 formula is the final development of the previous formula and in the formula accommodates the size of centre (mean) and data distribution (variance).

After the S value is obtained based on the various criteria above, then a behavioural analysis of the saturation flow is carried out by using multiple linear regression. The analysis is divided into two, namely as a whole (behaviour of motorcycles inside flow, Infront of stop line, and beside flow) to saturated flow and their respective behaviour by ignoring other behaviours (behaviour of Infront motorcycles to saturated flow, behaviour of motorcycles beside saturated flow and the behaviour of the inside motorcycle to saturated flow). The model obtained is then evaluated based on the value of its fit model using the R-Square approach and F-count (F significance). A model whose fit model is good, deserves to be interpreted, while a model whose fit model is still weak is considered not feasible. For the model of the influence of behaviour individually by ignoring other behaviours, a model is obtained as shown in Figure 1.

The regression model at a signalized intersection with an approach width of 3 meters without ESSM or with partial ESSM by only taking into one behavior and ignoring other behaviors, it is found that the behavior of infront of stop line, inside flow and beside flow has an effect on saturated flow. The regression model at a signalized intersection with an approach width of 5 meters without ESSM shows only that the behavior of the infront of stop line and beside has an effect on saturated currents, while the width of the approach of 5 meters with ESSM shows that only the behavior of the infront of stop line and inside flow has an effect on saturated flow. The regression model at a signalized intersection with an approach width of 7 meters without ESSM shows only that beside flow has an effect on saturation flow, while the width of the approach of 7 meters with ESSM shows that only inside flow has an effect on the saturation flow.

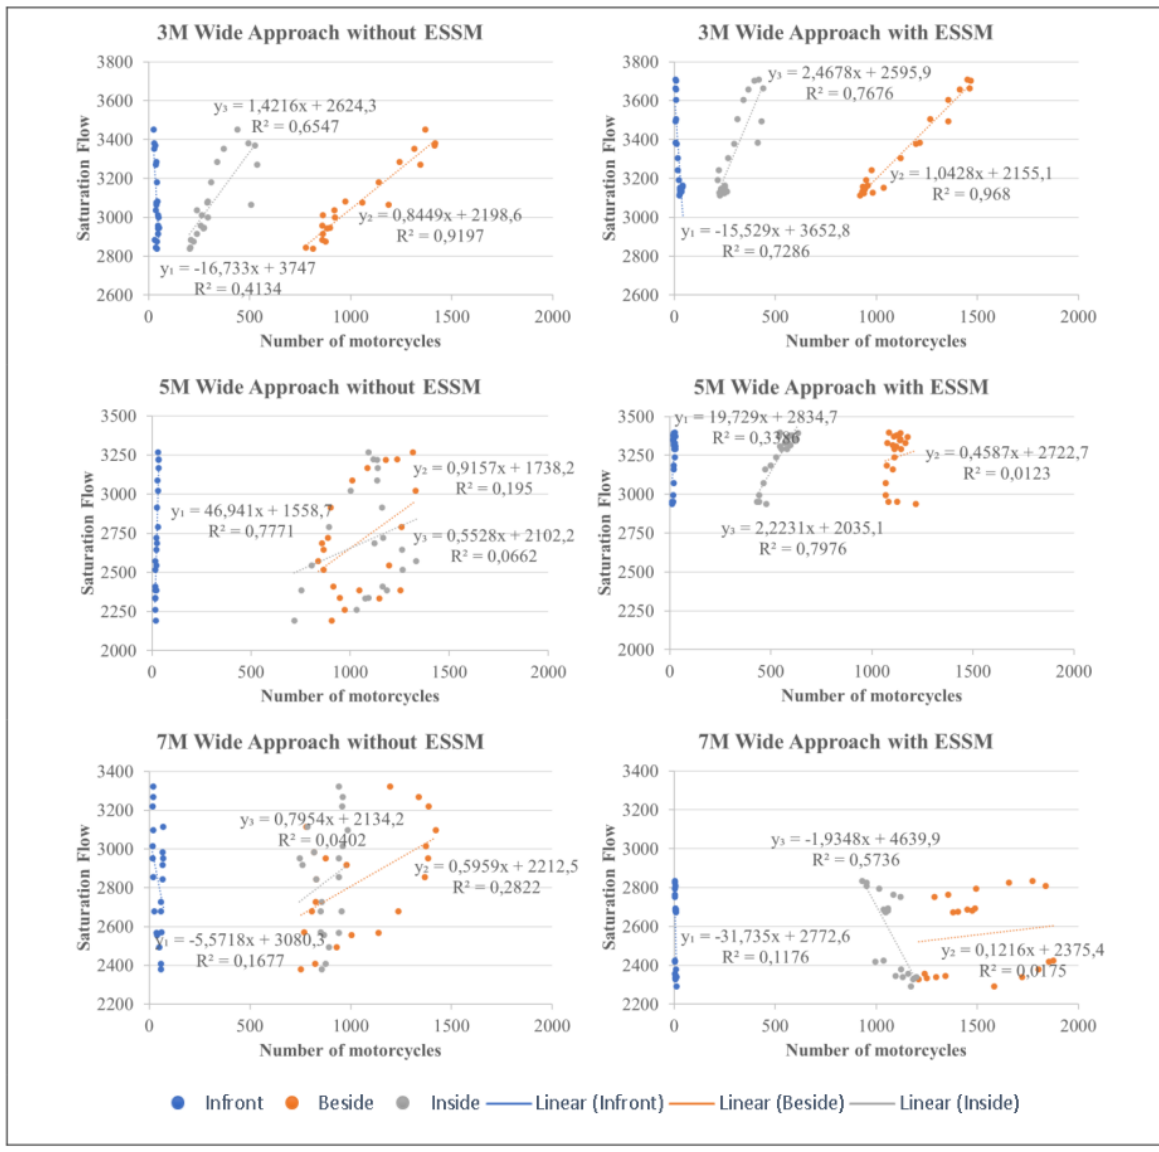


Figure 1. The model of the influence of each motorcycle behaviour on saturated flow ignores the influence of other behaviours

To show the relationship between the effect of motorcycle behaviour on saturated flow together with an approach width of 3 meters, 5 meters and 7 meters without ESSM, it is shown in Table 4. Meanwhile, to show the relationship between the effect of motorcycle behaviour on saturated flow together with the approach width 3 meters, 5 meters and 7 meters with ESSM are shown in Table 5.

The regression model at the intersection with a signal with an approximate width of 3 meters without ESSM taking into account all behaviors in the analysis (Infront of stop line, inside flow and beside flow) The regression analysis model in Non ESSM 3 produces a goodness of fit value with the

R-Square approach of 0.945 and the significance of F is 0.000. The significance value of F obtained is greater than 0.05, which means that the model built on the basis of the data obtained is feasible. By paying attention to the R-Square value of 0.945, it indicates that there is an effect of motorcycle behavior on saturation flow of 94.5%, while the remaining 5.5% is influenced by other factors outside the three independent variables at the intersection with a signal without ESSM with an approach width of 3 meters. Partially, a significance value is obtained at the Infront of 0.38, which means that there is no influence on the behavior of motorcycles in front of the stop line on saturated flow, but it

is different with beside flow and inside flow, which respectively get a significance value of 0.000 and 0.013 where beside and inside contributes a significant effect on saturation flows at the intersection with no ESSM signal with a width of 3 meters. The model for the saturation flow is obtained:

$$S=1968.85 + 1.92 \text{ MC Infront of stop line} + 1.21 \text{ MC beside} - 0.7 \text{ MC Inside} \quad (7)$$

The regression model at the intersection with a 3 meters

wide approach with ESSM produces a goodness of fit value with the R-Square approach of 0.972 and a significance of F of 0.000. The significance value of F obtained is greater than 0.05, which means that the model built on the basis of the data obtained is feasible. By paying attention to the R-Square value of 0.972, it indicates that there is an effect of motorcycle behavior on saturation flow of 97.2%, while the rest is influenced by other factors outside the three independent variables.

Table 4. Model of influence of motorcycle behaviour at signalized intersections without ESSM

Statistics	Non ESSM 3	Non ESSM 5	Non ESSM 7
Model	$Y=1968.85 + 1.92X_1 + 1.21X_2 - 0.7X_3$	$Y= 346.31 + 46.78X_1 + 0.27X_2 + 0.86X_3$	$Y=5710.93 - 7.79X_1 + 0.90X_2 - 3.93X_3$
R-Squared	0.945	0.915	0.464
Sig. F	0.000	0.000	0.012
Constant	1968.85	346.31	5710.93
Uns. Coeff.	Infront (X1): 1.92	Infront (X1): 46.78	Infront (X1): -7.79
	Beside (X2): 1.21	Beside (X2): 0.27	Beside (X2): 0.90
	Inside (X3): -0.7	Inside (X3): 0.86	Inside (X3): -3.93
Sig. t	Infront (X1): 0.38	Infront (X1): 0.000	Infront (X1): 0.55
	Beside (X2): 0.000	Beside (X2): 0.15	Beside (X2): 0.21
	Inside (X3): 0.013	Inside (X3): 0.000	Inside (X3): 0.084

Table 5. Model of influence of motorcycle behaviour at signalized intersections with ESSM

Statistics	ESSM 3	ESSM 5	ESSM 7
Model	$Y=2017.18 + 0.14X_1 + 1.19 - 0.42X_3$	$Y=2131.43 + 10.61X_1 - 0.18X_2 + 2.01X_3$	$Y= 5748.76 + 4.35X_1 - 0.35X_2 - 2.5X_3$
R-Squared	0.972	0.901	0.574
Sig. F	0.000	0.000	0.000
Constant	2107.18	2131.43	5748.76
Uns. Coeff.	Infront (X1): 0.14	Infront (X1): 10.61	Infront (X1): 4.35
	Beside (X2): 1.19	Beside (X2): -0.18	Beside (X2): -0.35
	Inside (X3): -0.42	Inside (X3): 2.01	Inside (X3): -2.5
Sig. t	Infront (X1): 0.928	Infront (X1): 0.003	Infront (X1): 0.755
	Beside (X2): 0.000	Beside (X2): 0.65	Beside (X2): 0.034
	Inside (X3): 0.16	Inside (X3): 0.000	Inside (X3): 0.000

Partially, a significance value is obtained for the Infront of 0.928 and the inside flow of 0.158, which means that there is no influence on the behavior of motorcycles in the Infront of stop line and inside flow on saturated flow. However, it is different with beside flow, obtaining a significance value of 0.000, where beside contributes a significant effect on saturated flow at a signalized intersection with ESSM with a 3 meters wide approach. The model for the saturation flow is obtained:

$$S=2017.18 + 0.14 \text{ MC Infront of stop line} + 1.19 \text{ MC beside} - 0.42 \text{ MC Inside} \quad (8)$$

The regression model at a signalized intersection with an approximate width of 5 meters without ESSM results in a goodness of fit value with the R-Square approach of 0.915 and a significance of F of 0.000. The significance value of F obtained is greater than 0.05, which means that the model built on the basis of the data obtained is feasible. By paying attention to the R-Square value of 0.915, it indicates that there is an influence of motorcycle behavior on saturation flow of 91.5%, while the rest is influenced by other factors outside the three independent variables. Partially, it is obtained a significance value beside flow of 0.15 which

means there is no influence of the behavior of motorcycles beside flow on saturated flow. However, in contrast to the infront of stop line and inside flow, it obtained a significance value of 0.000 where the infront of stop line and inside flow contributed significantly to the saturated flow at the signalized intersection without ESSM with an approach width of 5 meters. The model for the saturation flow is obtained: $S=346.31 + 46.78 \text{ MC Infront of stop line} + 0.27 \text{ MC beside} - 0.86 \text{ MC Inside}$ (9)

The regression model at the signalized intersection with an approximate width of 5 meters with ESSM produces a goodness of fit value with the R-Square approach of 0.901 and a significance of F of 0.000. The significance value of F obtained is greater than 0.05, which means that the model built on the basis of the data obtained is feasible. By paying attention to the R-Square value of 0.901, it indicates that there is an influence of motorcycle behavior on saturation flow of 90.1%, while the rest is influenced by other factors outside the three independent variables. Partially, it is obtained a significance value beside flow of 0.65, which means that there is no influence of the behavior of motorcycles beside flow on saturated flow. However, in

contrast to the infront of stop line and inside flow, it has a significance value of 0.003 and 0.000 where the infront of stop line and inside flow have a significant effect on saturated flow at the signalized intersection with ESSM with a 5 meters wide approach. The model for the saturation flow is obtained:

$$S=2131.43 + 10.61 \text{ MC Infront of stop line}-0.18 \text{ MC beside}+2.01 \text{ MC Inside.} \quad (10)$$

The regression model at the signalized intersection with an approach width of 7 meters without ESSM results in a goodness of fit value with the R-Square approach of 0.464 and a significance of F of 0.012. The significance value of F obtained is greater than 0.05, which means that the model built on the basis of the data obtained is feasible. By paying attention to the R-Square value of 0.464, it indicates that there is an effect of motorcycle behavior on saturated flow of 46.4%, while the rest is influenced by other factors outside the three independent variables. Partially, the significant values of infront of stop line, beside flow and inside flow are obtained, respectively 0.549, 0.206 and 0.084, which means that there is no influence on the behavior of motorcycles, infront of stop line, beside flow and inside flow separately. The model for the saturation flow is obtained:

$$S=5710.93 - 7.79 \text{ MC Infront of stop line}+0.90 \text{ MC beside}-3.93 \text{ MC Inside} \quad (11)$$

The regression model at a signalized intersection with an approximate width of 7 meters with ESSM produces a goodness of fit value with the R-Square approach of 0.574 and a significance of F of 0.000. The significance value of F obtained is greater than 0.05, which means that the model built on the basis of the data obtained is feasible. By paying attention to the R-Square value of 0.574, it indicates that there is an effect of motorcycle behaviour on saturated flow of 57.4%, while the rest is influenced by other factors outside the three independent variables. Partially, the Infront of stop line significance value is 0.755, which means that there is no effect of the behaviour of motorcycles in front of the stop line on saturated flows, However, it is different with beside flow and inside flow, obtaining a significance value of 0.034 and 0.000 where beside flow and inside flow have a significant effect on saturated flow at the signalized intersection with ESSM with a 7 meters wide approach. The model for the saturation flow is obtained:

$$S=5748.76 + 4.35 \text{ MC Infront of stop line}-0.35 \text{ MC beside}-2.5 \text{ MC Inside} \quad (12)$$

The addition of the number of motorcycles that are in the inside flow of the approach which has a lane width of 3 meters and 7 meters with and without ESSM can reduce saturation currents. Increasing the number of motorcycles on the front of the stop line can reduce the saturation current in the approach with 7 meters lane width without ESSM. The increase in the number of motorcycles on the beside flow reduces the saturated current in the approach with a lane width of 5 meters and 7 meters with ESSM.

4. Conclusion

This model of the effect of saturated flow on motorcycle behavior applies to through movement with traffic conditions dominated by motorcycles, the percentage of motorcycles is 76% to 90% and the effective width of the approach is 3 meters, 5 meters, and 7 meters with or without ESSM. The model generated from the regression analysis of the influence of motorcycle behavior (infront of stop line, beside flow and inside flow) together produces a better model than the model obtained from the regression analysis separately, namely the effect of the behavior of motorcycles on the infront of stop line on saturated flow, the effect of the behavior of motorcycles beside flow on saturated flow and the influence of the behavior of motorcycles inside flow on saturated flow.

The ESSM in Denpasar, Bali is currently unable to accommodate a large number of motorcycles at a signalized intersection, so special lanes are needed for motorcycles. At the intersection with 3 meters width of approach with or without motorcycle ESSM, the motorcycle beside flow affects the saturation flow the most, so it is necessary to make a motorcycle lane on the left or right of another vehicle. Whereas for a signal intersection with a 5 lanes width with and without ESSM and a 7 lanes width with the ESSM of the motorcycle inside the most influencing the saturated flow so that a motorcycle lane is needed in the middle of another vehicle.

By knowing the behavior of motorcycles at a signalized intersection with an approach width 3 meters, 5 meters, 7 meters with or without ESSM, the saturation flow can be determined without counting the number of light or heavy vehicles, especially for the 3 and 5 meter approach widths. Further research is needed with conditions like this in other cities, so that better results can be obtained

Acknowledgements

I am very grateful to Ngurah Rai University for the support. We are grateful to anonymous reviewers for their valuable comments on the earlier version of this paper.

REFERENCES

- [1] Adams C., Abdul M., Zambang M., & Boahen R, "Effects of motorcycles on saturation flow rates of mixed traffic at signalized intersections in Ghana," International Journal of Traffic and Transportation Engineering, vol. 4, no. 3, pp. 94-101, 2015.
- [2] Al-Ghamdi A, "Entering headway for through movements at urban signalized intersections," Transportation Research Record, vol. 1678, no. 1, pp. 42-47, 1999. DOI: 10.3141/1678-06
- [3] Amelia S., Juanita, "Effectiveness of Application of Special Stop Rooms (Rhk) at Urban Road Intersections (Case Study: Bandung City Pasteur-Pasirkaliki Road Intersection)," Techno Scientific Magazine, vol. 12, no. 2, pp. 64-100, 2011.

- [4] Central Bureau of Statistics of Bali Province. "Bali in Numbers." Central Bureau of Statistics of Bali Province, <https://bali.bps.go.id/publication/2019/08/16/99cd2c6d79aad1a0062dddfc/provinsi-bali-dalam-angka-2019.html> (accessed Jan. 28, 2020).
- [5] Chang Qiao Shao, Xiao Ming Liu, "Estimation of Saturation Flow Rates at Signalized Intersections," *Discrete Dynamics in Nature and Society*, vol. 2012, pp. 1-9, 2012. DOI: 10.1155/2012/720474
- [6] Chu Cong Minh, Kazushi Sano, "Analysis of Motorcycle Effects to Saturation Flow Rate at Signalized Intersection in Developing Countries," *Journal of the Eastern Asia Society for Transportation Studies*, vol. 5, no. 10, pp. 1211-1222, 2003.
- [7] Fadli S., Elkhasnet, "Comparison of the Value of Saturated Flow in the Simpson Approach with and without Exclusive Stopping Space for Motorcycle," *Transportation Journal*, vol. 12, no. 3, pp. 217-226, 2012.
- [8] H. Nguyen., F. Montgomery, "Different Models of Saturation Flow in Traffic Dominated by Motorcycles," *Journal of the Eastern Asia Society for Transportation Studies*, vol. 7, no. 2002, pp. 2381-2395, 2007. DOI: 10.11175/easts.10.1734
- [9] Hongwei Li, Xin Zhong, Wenbo Zhang, Sulan Li, Yingying Xing, "An algorithm for e-bike equivalents at signalized intersections based on traffic conflict events number," *Transportation Research Part A: Policy and Practice*, vol. 134, no. 4, pp. 78-95, 2012. DOI: 10.1016/j.tra.2020.02.007
- [10] I.M.Kariyana, G. Sumarda., N. P. G. Swarupini, "Inventory and Evaluation of Exclusive Stopping Space for Motorcycle (ESSM) Motorcycles in Denpasar City," *Gradient Engineering Journal*, vol. 12, no. 2, pp. 16-24, 2020.
- [11] Leong Lee Vien, Wan Hashim Wan Ibrahim, Ahmad Farhan Mohd, "Effect of Motorcycles Travel Behaviour on Saturation Flow Rates at Signalized Intersections in Malaysia," 23rd ARRB Conference – Research Partnering with Practitioners, Adelaide Australia, 2008, 1–11.
- [12] Ministry of Public Works and Public Housing, "Guidelines for Designing Special Stopping Rooms (RHK) for Motorcycles at Signalized Intersections in Urban Areas." Ministry of Public Works and Public Housing. <http://sni.litbang.pu.go.id/index.php?r=/sni/new/sni/detail/id/1044> (accessed Jan. 28, 2020).
- [13] Ministry of Public Works, "Signaled Intersection," in Indonesian Road Capacity Manual (IRCM), Directorate General of Highway, 1997, pp. 2-38.
- [14] Ministry of Works Malaysia, "Chapter 3," in Malaysian Highway Capacity Manual 2006, [10] Ministry of Works Malaysia, 2006.
- [15] Mithun Mohan., Satish Chandra, "Queue Clearance Rate Method for Estimating Passenger Car Equivalents at Signalized Intersections," *Journal of Traffic and Transportation Engineering*, vol. 4, no. 5, pp. 487-495, 2017. DOI: 10.1016/j.jtte.2016.12.003
- [16] Mohmmad Rameez, Sandeep Singla, Manish Kaushal, "A Study on Discharge Headway Modeling at a Signalized Intersection under Heterogeneous Traffic Conditions," *International Journal for Research in Applied Science and Engineering Technology (IJRASET)*, vol. 6, no. X pp. 232-238, 2018.
- [17] Mohsin Shahzad Chaudhry, Prakash Ranjitkar, Douglas J. Wilson, "Queue Discharge Behavior at Signalized Intersection: A Comparison Between Field Measurements with Analytical and Microsimulation Models," *Journal of the Eastern Asia Society for Transportation Studies*, vol. 9, no. 2011, pp. 1628-1643, 2011. DOI: 10.11175/easts.9.1628
- [18] Partha Saha., H. M. Iqbal Mahmud., Quazi Sazzad Hossain, MD. Zahurul Islam, "Passenger car equivalent (PCE) of through vehicles at signalized intersections in Dhaka metropolitan city, Bangladesh," *IATSS Research*, vol. 33, no. 2, pp. 99-104, 2009. DOI: 10.1016/S0386-1112(14)60248-X
- [19] Saad Touhbi, Mohamed Ait Babram, Tri Nguyen-Huu, Nicolas Marilleau, Moulay L. Hbid, Christophe Cambier, Serge Stinckwich, "Time Headway analysis on urban roads of the city of Marrakesh," *Procedia Computer Science*, vol. 130, no. 2018, pp. 111-118, 2018. DOI: 10.1016/j.procs.2018.04.019
- [20] Satyajit Mondal, Ankit Gupta, "Discharge characteristics analysis of queued-up vehicles at signal-controlled intersections under heterogeneous traffic conditions," *International Journal of Civil Engineering*, vol. 17, no. 5, pp. 619-628, 2018. DOI: 10.1007/s40999-018-0343-7
- [21] Satyajit Mondal, Vijai Kumar Arya, Ankit Gupta, Samsi Gunarta, "Comparative analysis of saturation flow using various PCU estimation methods," *Transportation Research Procedia*, vol. 48, no. 2020, pp. 3153-3162, 2020. DOI: 10.1016/j.tpro.2020.08.168

The Saturated Flow Modeling On Motorcycle Behavior In Through Movement

ORIGINALITY REPORT

12%

SIMILARITY INDEX

5%

INTERNET SOURCES

10%

PUBLICATIONS

1%

STUDENT PAPERS

PRIMARY SOURCES

- 1** I M Kariyana, P A Suthanaya, D M P Wedagama, I M A Ariawan, D Dissanayake. "The influence of motorcycle behavior on saturation flow rate at signalized intersections with and without exclusive stopping space for motorcycle (ESSM)", IOP Conference Series: Earth and Environmental Science, 2021
Publication **3%**
- 2** Chang-qiao Shao, Xiao-ming Liu. "Estimation of Saturation Flow Rates at Signalized Intersections", Discrete Dynamics in Nature and Society, 2012
Publication **3%**
- 3** sloap.org
Internet Source **1%**
- 4** psychologyandeducation.net
Internet Source **1%**
- 5** doaj.org
Internet Source **1%**

6

A. Hasan, R. Adrian, D. Syamanda, D. Budi, A. Mirza, Indrayani. "Performance analysis of Patal – Pusri Intersection after underpass operated", Journal of Physics: Conference Series, 2020

Publication

1 %

7

Lee Vien Leong, Jong Hui Lee. "Chapter 95 Impact of Motorcyclists' Travel Behavior on Delay and Level-of-Service at Signalized Intersections in Malaysia", Springer Science and Business Media LLC, 2017

Publication

<1 %

8

issuu.com

Internet Source

<1 %

9

Budi Yulianto, Setiono, Rizki Dewayani Putri, Stevani Tia Pratisca, Felix Fernando Hartono. "Calibration and Validation Indonesian Highway Capacity Manual 1997 Model", IOP Conference Series: Materials Science and Engineering, 2020

Publication

<1 %

10

Arpita Saha, Souvik Chakraborty, Satish Chandra, Indrajit Ghosh. "Kriging based saturation flow models for traffic conditions in Indian cities", Transportation Research Part A: Policy and Practice, 2018

Publication

<1 %

- | | | |
|----|--|------|
| 11 | Mithun Mohan, Satish Chandra. "Queue clearance rate method for estimating passenger car equivalents at signalized intersections", Journal of Traffic and Transportation Engineering (English Edition), 2017
Publication | <1 % |
| 12 | link.springer.com
Internet Source | <1 % |
| 13 | www.researchgate.net
Internet Source | <1 % |
| 14 | "Transportation Research", Springer Science and Business Media LLC, 2020
Publication | <1 % |
| 15 | lupinepublishers.com
Internet Source | <1 % |
| 16 | tuprints.ulb.tu-darmstadt.de
Internet Source | <1 % |
| 17 | www.nrcresearchpress.com
Internet Source | <1 % |
| 18 | Yang Teng, Jin Xu, Kun Gao, Ziling Zeng. "Chapter 16 Modelling the Relationships Between Headway and Speed in Saturation Flow of Signalised Intersections", Springer Science and Business Media LLC, 2020
Publication | <1 % |

Exclude quotes On

Exclude matches Off

Exclude bibliography On